

EtherCAT®



ECAT-2024C/ECAT-2028C

EtherCAT SubDevice I/O Module with Isolated 4-/8-channel AO(Current and Voltage Output)

Features

- On the fly processing: EtherCAT
- Powerful MCU handles efficient network traffic
- 2 x RJ-45 bus interface
- Distance between stations up to 100 m (100BASE-TX)
- Support daisy chain connection
- EtherCAT conformance test tool verified
- Removable terminal block connector
- LED indicators for the input status
- 12-bit Analog Output: 4-ch (ECAT-2024C); 8-ch (ECAT-2028C)
- ESD Protection 4 kV Contact for each channel



Introduction


The ECAT-2024C/ECAT-2028C is an industrial SubDevice I/O module built in 4/8 12-bit Analog Output channels. It is equipped with the EtherCAT* protocol and installed by daisy chain connection that provides a more scalable system with fewer wires. Users can obtain the input and output status not only via the process data but also from its LED indicators. The ECAT-2024C/2028C has passed and verified by the conformance test tool, therefore eligible EtherCAT Main Device or configurator can manipulate it simply and implement your various applications easily.

* EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.


Hardware Specifications

Model	ECAT-2024C	ECAT-2028C
Analog Output		
Channels	4	8
Range	±5 V, ±10 V, 0 ~ 5V, 0 ~ 10V, 0 ~ 10 mA, 0 ~ 20 mA	
Resolution	12-bit	
Accuracy	±0.1% of FSR	
Zero Drift	±30 μV/°C	
Span drift	±25 ppm/°C	
EtherCAT		
Ports	2 x RJ-45	
Distance Between Stations	100 m Max. (100BASE-TX)	
Data Transfer Medium	Ethernet/EtherCAT Cable (Min. CAT 5), Shielded	
Cycle Time	1 ms	
Distributed Clocks	Yes	
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact for Each Terminal	
EFT (IEC 61000-4-4)	Signal: 1 KV Class A; Power: 1 KV Class A	
Surge (IEC 61000-4-5)	1 KV Class A	
Power		
Input Voltage Range	+10 ~ +30 Vdc	
Power Consumption	4 W Max.	
Mechanical		
Dimensions (W x L x H)	33 mm x 127 mm x 108 mm	
Installation	DIN-Rail Mounting	
Casing	Plastic	
Environment		
Operating Temperature	-25 ~ +75°C	
Storage Temperature	-30 ~ +80°C	
Relative Humidity	10 ~ 90% RH, Non-condensing	


Pin Assignments

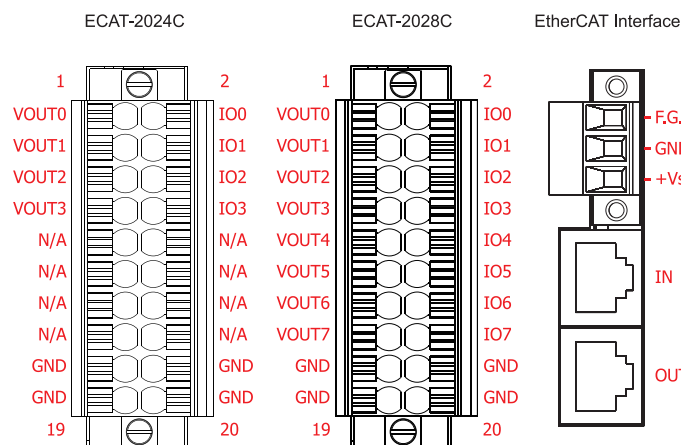


Wire Connections

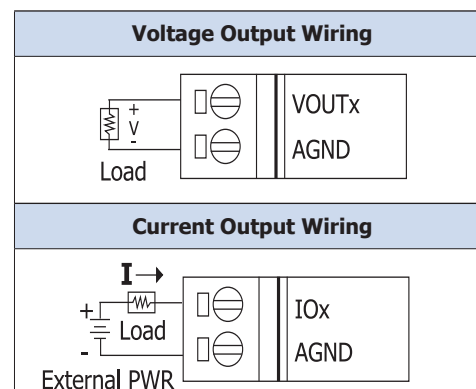

Applications

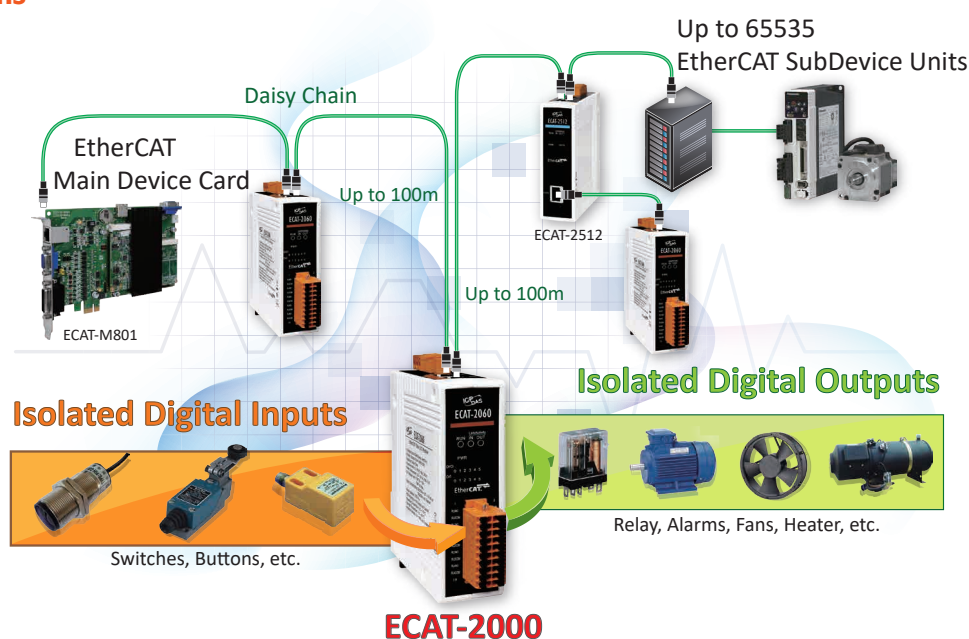

Dimensions (Units: mm)

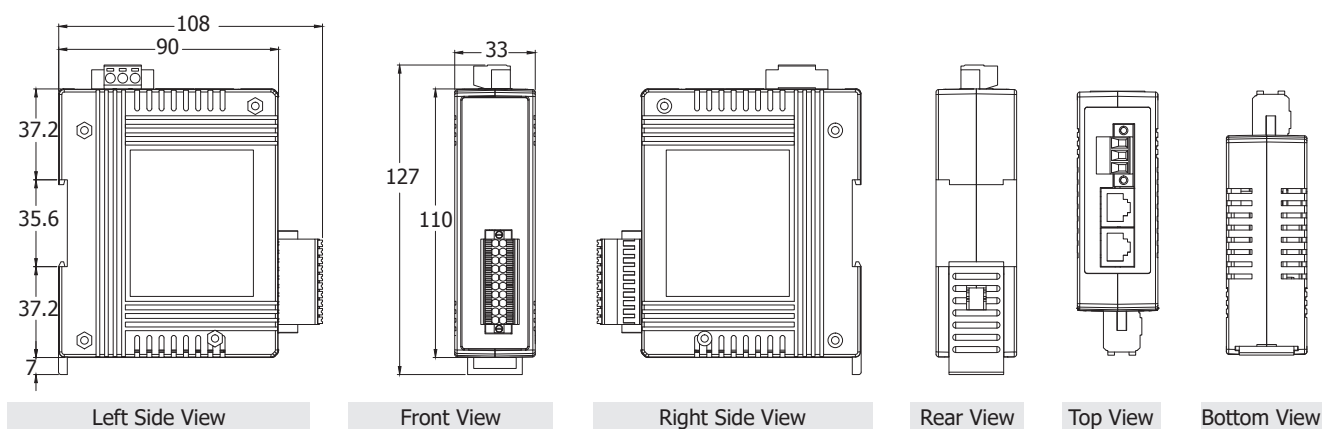

Ordering Information

ECAT-2024C CR	EtherCAT SubDevice I/O Module with Isolated 4-channel Analog Output (RoHS)
ECAT-2028C CR	EtherCAT SubDevice I/O Module with Isolated 8-channel Analog Output (RoHS)