

5.2. RS-485 I/O Expansion Unit

Introduction

The RU-87Pn series RS-485 remote I/O expansion unit is designed to acquire and control remote I/O through RS-485 connections. It comprises

- A CPU module with non-volatile memory to backup/restore I/O module configurations; LED indicators to diagnose the I/O module; and a RS-485 port for 1.2 Km long distance communication.
- A power module
- A backplane with a number of I/O slots for flexible I/O configuration.

With its patent-pending technologies, namely auto configuration and hot swap, it saves lots of labor on the set up and maintenance of the automation systems. Reliable 3-piece construction enables users to hot swap modules during operation, without rewiring. All I/O module data are backed up in the non-volatile memory of the RU-87Pn. After hot-swapping a module, all settings are automatically loaded to recover.

Furthermore, with the RS-485 network communication interface and more than 30 I/O modules for choice, users can apply the unit to nearly any automation system.



Features

1. Hot Swap

Reliable 3-piece construction enables users to hot swap modules during operation, without rewiring. All I/O module data are backed up in the non-volatile memory of the RU-87Pn. After hot-swapping a module, all settings are automatically loaded to recover.

2. Auto Configuration

The I-87K I/O modules can be pre-configured and backed up in the non-volatile memory of the RU-87Pn. When the RU-87Pn is power on or plugged in, the RU-87Pn will automatically checks and restores these configurations to each I-87K I/O modules on it.

3. Easy Duplicate System

Using the DCON Utility, you can easily make a backup of the I-87K module configurations and write to another RU-87Pn. This design can easily and quickly duplicate many RU-87Pn.

4. Easy Maintenance and Diagnosis

The basic configurations (includes station number, baudrate) are set by the rotary and DIP switches. The operator can use only one screwdriver to set the RU-87Pn. And there are several LED status indicators to show whether I-87K modules are configured and work properly.

If one I-87K module fails, the operator just needs to replace it with one good I-87K module with the same item number. And then checks the LED indicators to know whether the replacement is performed correctly. The switch and LED design makes it easy for maintenance. There is no PC and Notebook needed.

5. Communication

- RS-485 industrial multi-drop network
The RU-87Pn uses the industrial EIA RS-485 communication to transmit and receive data over long distance (1.2 Km).

- **DCON protocol**

I-87K series I/O modules plugged in a RU-87Pn provides a simple command/response protocol (named DCON protocol) for communication. All command/response are in easy use ASCII format.

6. Fully Software Support

The free charge software utility and development kits include

A: DCON Utility: for configuration

B: OPC Servers:

OPC is an industrial standard interface based on OLE technology. With the OPC server, I/O modules can be easily integrated to any software that has OPC client capability.


C. EZ Data Logger

EZ Data Logger is a small data logger software. It can be applied to small remote I/O system.

With its user-friendly interface, users can quickly and easily build a data logger software without any programming skill.

D. Various Software Develop Toolkits

DLL, ActiveX, Labview driver, Indusoft driver, DasyLab driver, Linux driver

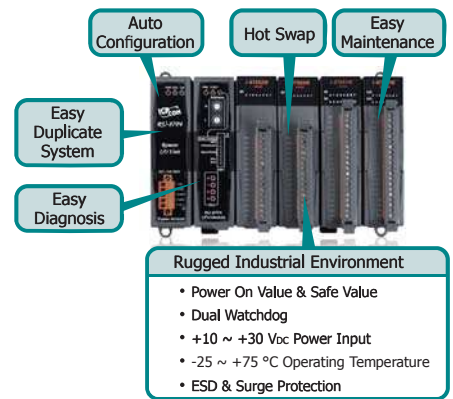



Highlight Information

- One RS-485 Port for Multi-Drop Topology
- Hot Swap Allowed
- Auto Configuration
- LED Indicators for Fault Detection
- Switches to Configure Communication
- DCON Protocol
- 1/2/4/8 I/O Slots for I-87K Modules
- Operating Temperature: -25 ~ +75°C



Introduction


RU-87Pn series is a remote intelligent I/O expansion unit to expand I-87K series I/O modules over the RS-485 for industrial monitoring and controlling applications.

RU-87Pn is designed to be used in harsh and noisy environment, so the hardware is manufactured with wide power input range (10 ~ 30 Vdc), isolated power input and can operate under wide temperature (-25 ~ +75°C). To simplify installation and maintenance of I/O modules, it provides many useful features, such as: hot swap allowed, auto configuration, LED indicators for fault detection, dual watchdog to keep alive, programmable power on and safe values for safety.

There are more than 30 I/O modules supported with the unit, including analog input/output, digital input/output, counter, frequency I/O modules. We provide various software development kits (SDK) and demos, such as DLL, ActiveX, Labview driver, InduSoft driver, Linux driver, OPC server, etc. The I-87K series I/O modules plugged in the RU-87Pn can be easily integrated into variant software system.

Applications

Rich I/O Expansion Ability

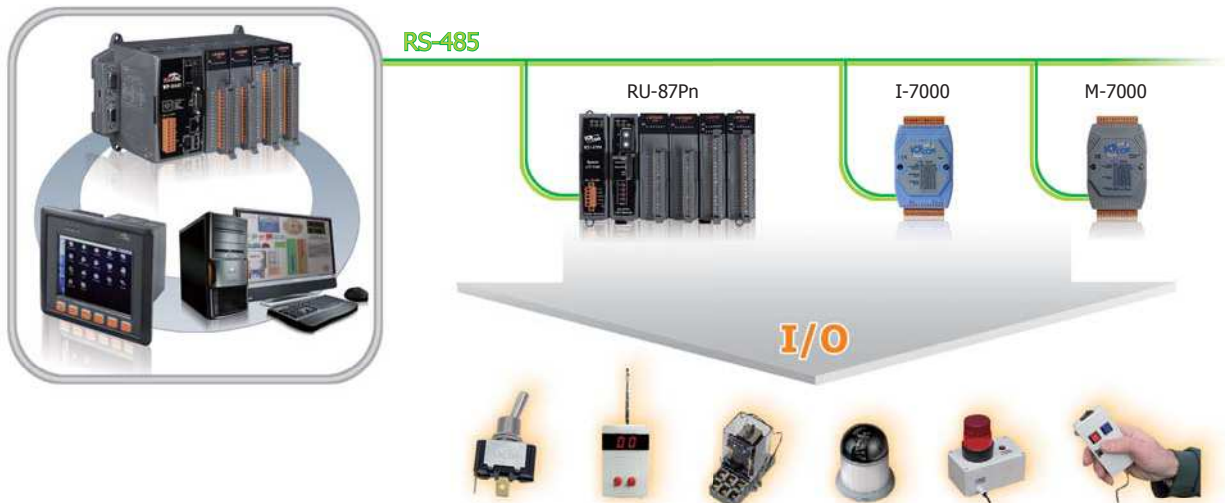


Specifications

Models	RU-87P1	RU-87P2	RU-87P4	RU-87P8
Interface Type (RS-485)				
Baud Rate	115200 bps maximum			
Distance	1.2 km (4000 ft) maximum			
Isolation	3000 V _{oc}			
ESD Protection	+/-4 K Contact Discharge and +/-8 K Air Discharge			
Communication Protocol	DCON Protocol (ASCII Format)			
Switch				
Rotary Switch	x2, For RS-485 address			
DIP Switch	8-bit x 1, For auto configuration, check sum and baud rate			
LED Indicators				
Power	Yes			
System Ready	Yes			
Auto Configuration	Yes			
Slot Status	Yes			
I/O Expansion Slots				
Hot Swap	Yes			
Auto Configuration	Yes			
Support Module Type	High profile I-87K module only			
Slots Numbers	1	2	4	8
Mechanical				
Dimensions (W x L x H)	64 mm x 120 mm x 110 mm	95 mm x 132 mm x 111 mm	188 mm x 132 mm x 111 mm	312 mm x 132 mm x 111 mm
Installation	DIN-Rail or Wall Mounting			
Environmental				
Operating Temperature	-25 ~ +75°C			
Storage Temperature	-30 ~ +80°C			
Ambient Relative Humidity	10 ~ 90% RH (non-condensing)			
Power				
Input Range	+10 ~ +30 V _{oc}			
Reverse Polarity Protection	Yes			
Isolation	1000 V _{oc}			
Frame Ground	Yes			
Consumption	1 W	1 W	2 W	2.4 W
Power Board Driving	5 W	8 W	30 W	30 W

Appearance

RU-87P8

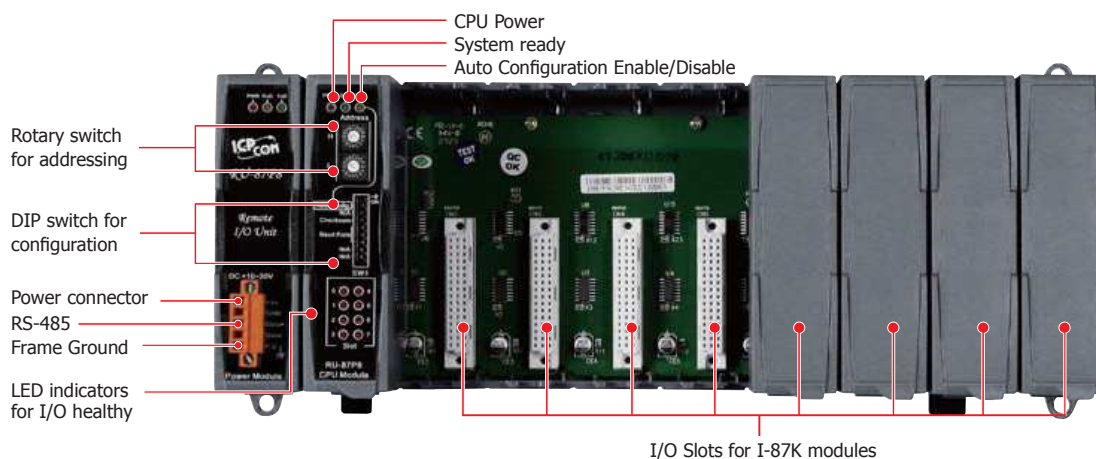

Ordering Information

RU-87P1 CR	1 slot I/O Expansion Unit (RoHS)
RU-87P2 CR	2 slots I/O Expansion Unit (RoHS)
RU-87P4 CR	4 slots I/O Expansion Unit (RoHS)
RU-87P8 CR	8 slots I/O Expansion Unit (RoHS)

Accessories

DP-660	24 V _{oc} /2.5 A, 60 W and 5 V _{oc} /0.5 A, 2.5 W Power Supply with DIN-Rail Mounting
DP-665	24 V _{oc} /2.7 A, 65 W Power Supply with DIN-Rail Mounting
DP-1200 CR	24 V _{oc} /5.0 A, 120 W Power Supply with DIN-Rail Mounting (RoHS)
MDR-20-24 CR	24 V _{oc} /1.0 A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
I-7560 CR	USB to RS-232 Converter (RoHS)

5.3. Ethernet I/O Expansion Unit


• Introduction

The ET-87Pn series Ethernet remote I/O expansion unit is designed to acquire and control remote I/O through Ethernet connections. It comprises

- A CPU module with non-volatile memory to backup/restore I/O module configurations; LED indicators to diagnose the I/O module; and a two-port Ethernet switch for long distance communication.
- A power module
- A backplane with a number of I/O slots for flexible I/O configuration.

With its patent-pending technologies, namely auto configuration and hot swap, it saves lots of labor on the set up and maintenance of the automation systems. Reliable 3-piece construction enables users to hot swap modules during operation, without rewiring. All I/O module data are backed up in the non-volatile memory of the ET-87Pn. After hot-swapping a module, all settings are automatically loaded to recover.

Furthermore, with the Ethernet network communication interface and more than 30 I/O modules for choice, users can apply the unit to nearly any automation system.

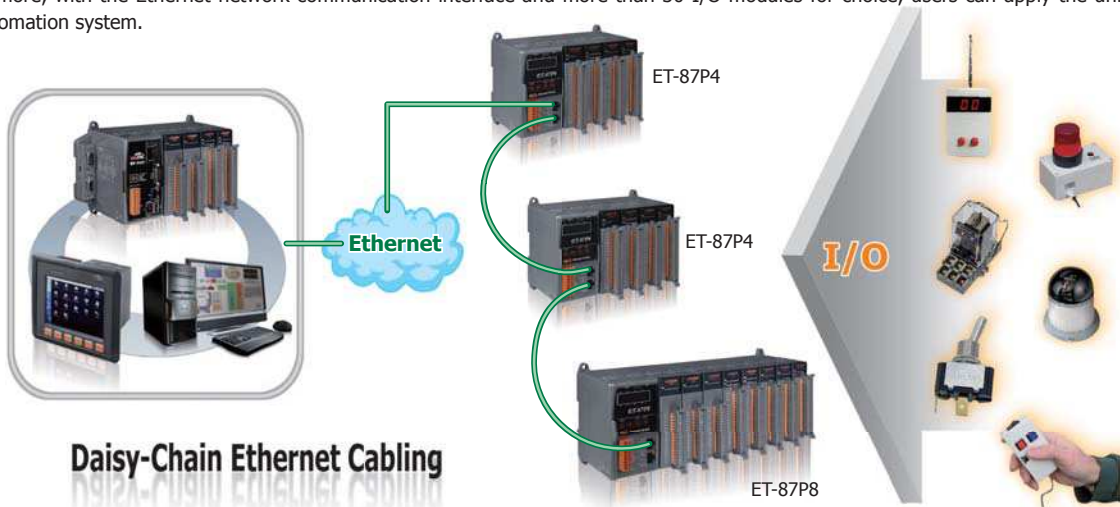

Daisy-Chain Ethernet Cabling

• Features

1. Hot Swap

Reliable 3-piece construction enables users to hot swap modules during operation, without rewiring. All I/O module data are backed up in the non-volatile memory of the ET-87Pn. After hot-swapping a module, all settings are automatically loaded to recover.

2. Auto Configuration

The I-87K I/O modules can be pre-configured and backed up in the non-volatile memory of the RU-87Pn. When the ET-87Pn is power on or plugged in, the ET-87Pn will automatically checks and restores these configurations to each I-87K I/O modules on it.

3. Easy Duplicate System

Using the DCON Utility, you can easily make a backup of the I-87K module configurations and write to another RU-87Pn. This design can easily and quickly duplicate many ET-87Pn.



4. Easy Maintenance and Diagnosis

The basic configurations (includes IP settings) are set by the push buttons and 7-segment LED display. The operator can easily set the ET-87Pn. And there are several LED status indicators to show whether I-87K modules are configured and work properly.

If one I-87K module fails, the operator just needs to replace it with one good I-87K module with the same item number. And then checks the LED indicators to know whether the replacement is performed correctly. The push buttons and LED display design makes it easy for maintenance. There is no PC and Notebook needed.



- Auto Configuration
- Hot Swap
- Easy Maintenance
- Easy Duplicate System
- Easy Diagnosis
- Daisy-Chain Ethernet Cabling



Rugged Industrial Environment

- Power On Value & Safe Value
- Dual Watchdog
- +10 ~ +30 Vdc Power Input
- -25 ~ +75 °C Operating Temperature
- ESD & Surge Protection


5. Communication

- Daisy-Chain Ethernet topology

The ET-87Pn has a built-in two-port Ethernet switch to implement daisy-chain topology. The cabling is much easier and total costs of cable and switch are significantly reduced.

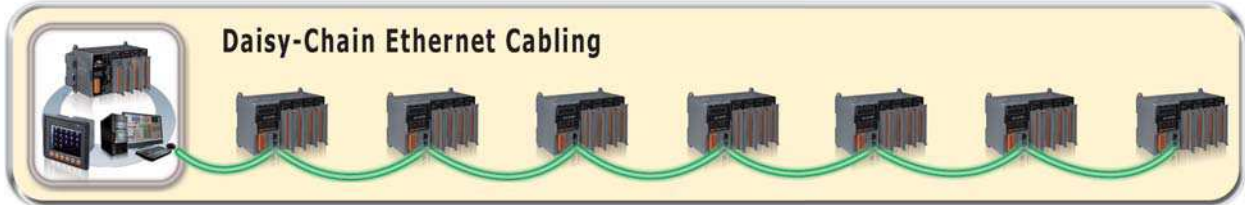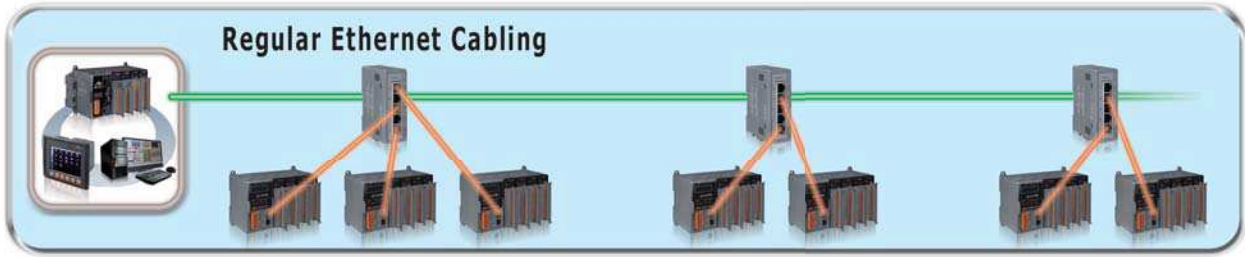


- LAN Bypass Feature
LAN Bypass feature guarantees the Ethernet communication. It will automatically active to continue the network traffic when ET-87Pn loses its power.
- DCON protocol
I-87K series I/O modules plugged in a ET-87Pn provide a simple command/response protocol (Called DCON protocol) for communication. All command/response are in easy used ASCII format.

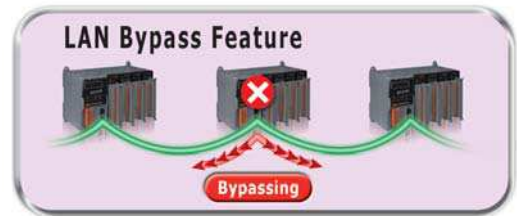

6. Fully Software Support

The free charge software utility and development kits include

- A: DCON Utility: for configuration
- B: OPC Servers:
OPC is an industrial standard interface based on OLE technology. With the OPC server, I/O modules can be easily integrated to any software that has OPC client capability.
- C. EZ Data Logger
EZ Data Logger is a small data logger software. It can be applied to small remote I/O system. With its user-friendly interface, users can quickly and easily build a data logger software without any programming skill.

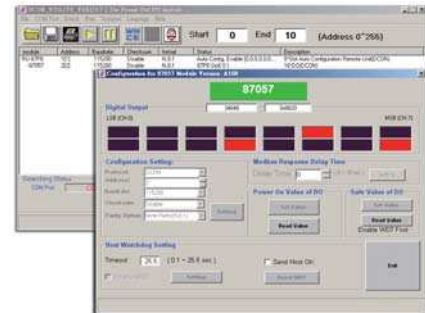

EZ Data Logger
DCON
Modbus TCP
Modbus Serial

★Virtual Channel Definition ★Control Logic (VB Script)

★Alarm Notifier

High/Low Alarm

★IP Camera Viewer

Layout

Data Trend

Database and Report

The banner features several icons: a bar chart for 'High/Low Alarm', a person with a smartphone for 'Alarm Notifier', a camera for 'IP Camera Viewer', a line graph for 'Data Trend', and a table for 'Database and Report'. Green arrows indicate the flow between these features.

- D. Various Software Develop Toolkits
DLL, ActiveX, Labview driver, Indusoft driver, DasyLab driver, Linux driver



Highlight Information

- Two Ethernet Ports for Daisy-Chain Topology
- LAN Bypass Feature
- Hot Swap Allowed
- Auto Configuration
- LED Indicators for Fault Detection
- Push Buttons to Configure IP Address
- DCON Protocol
- 2/4/8 I/O Slots for I-87K Modules
- Operating Temperature: -25 ~ +75°C



Introduction


ET-87Pn series is a remote intelligent I/O expansion unit to expand I-87K series I/O modules over the Ethernet for industrial monitoring and controlling applications. It offers two Ethernet switch ports to form a daisy-chain topology. The daisy-chain feature allows ET-87Pn to connect in series to each other or other Ethernet devices. Users can easily simplify the cabling and save installation space with the feature.

ET-87Pn is designed to be used in harsh and noisy environment, so the hardware is manufactured with wide power input range (10 ~ 30 Vdc), isolated power input and can operate under wide temperature (-25 ~ +75°C). To simplify installation and maintenance of I/O modules, it provides many useful features, such as: hot swap allowed, auto configuration, LED indicators for fault detection, dual watchdog to keep alive, programmable power on and safe values for safety.

There are more than 30 I/O modules supported with the unit, including analog input/output, digital input/output, counter, frequency I/O modules. We provide various software development kits (SDK) and demos, such as DLL, ActiveX, Labview driver, InduSoft driver, Linux driver, OPC server, etc. The I-87K series I/O modules plugged in the ET-87Pn can be easily integrated into variant software system.

Applications

Rich I/O Expansion Ability

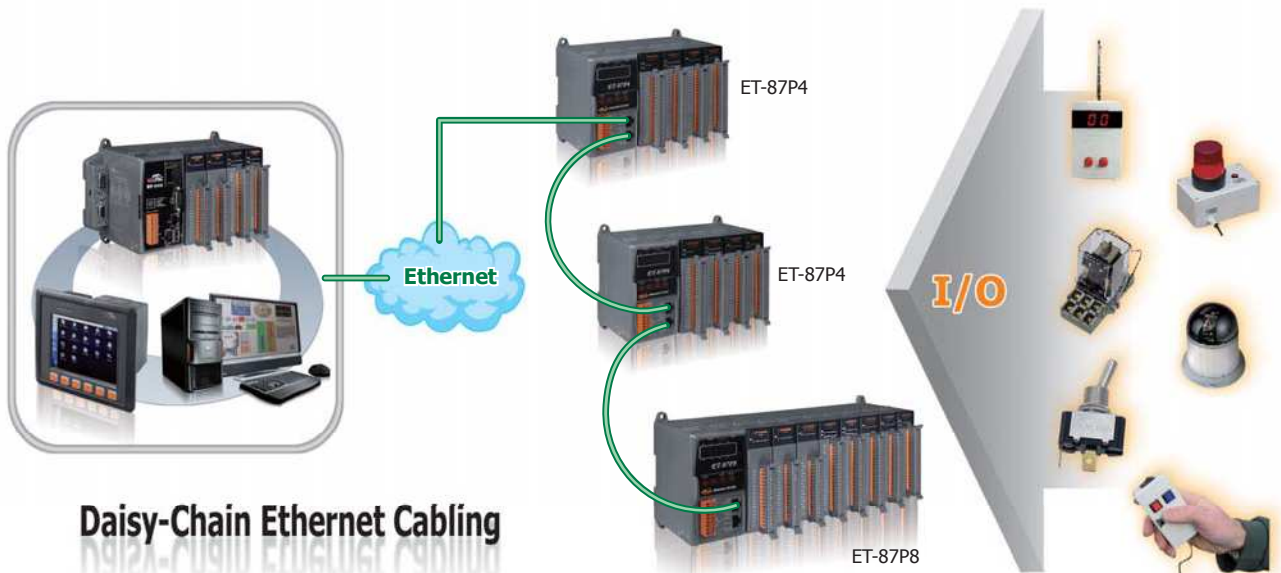


Daisy-Chain Ethernet Cabling

Specifications

Models	ET-87P2	ET-87P4	ET-87P8
Interface Type: Ethernet			
Port	RJ-45 × 2 10/100Base-TX (Auto-negotiating, Auto MDI/MDI-X, LED indicators)		
Cabling	Daisy-Chain Ethernet Cabling		
Isolation	1500 V _{DC}		
ESD Protection	+/- 4 K Contact Discharge and +/- 8 K Air Discharge		
Communication Protocol	DCON Protocol (ASCII format)		
LED Display/Indicators			
Power	Yes		
System Ready	Yes		
Auto Configuration	Yes		
Slot Status	Yes		
IP Address	Yes (with push buttons to configure IP address)		
I/O Expansion Slots			
Hot Swap	Yes		
Auto Configuration	Yes		
Support Module Type	High profile I-87K module only		
Slots Numbers	2	4	8
Mechanical			
Dimensions (W x H x D)	126 mm x 132 mm x 111 mm	188 mm x 132 mm x 111 mm	312 mm x 132 mm x 111 mm
Environmental			
Operating Temperature	-25 ~ +75°C		
Storage Temperature	-30 ~ +80°C		
Ambient Relative Humidity	10 ~ 90% RH (non-condensing)		
Power			
Input Range	+10 ~ +30 V _{DC}		
Redundant Input	Yes		
Reverse Polarity Protection	Yes		
Isolation	1000 V _{DC}		
Frame Ground	Yes		
Consumption	2 W	2 W	2.4 W
Power Board Driving	30 W		

Appearance

ET-87P8

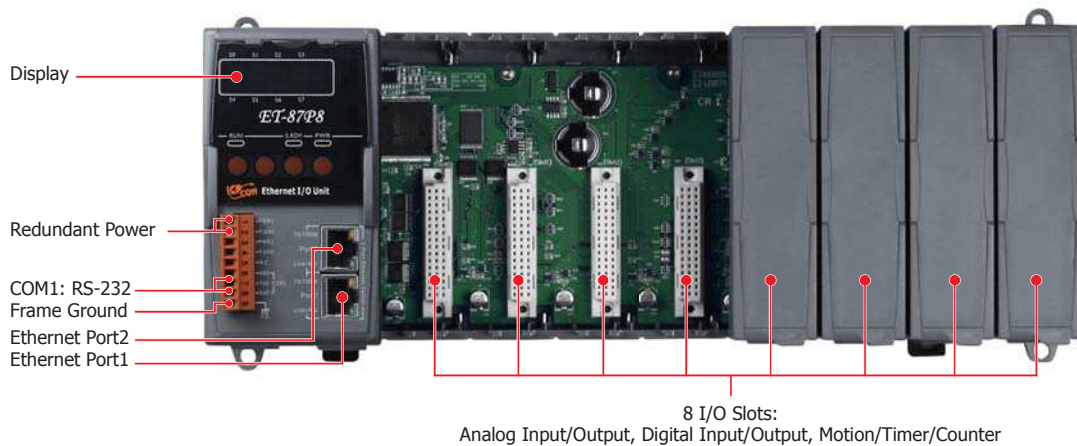


Ordering Information

ET-87P2 CR	2 slots I/O Expansion Unit
ET-87P4 CR	4 slots I/O Expansion Unit
ET-87P8 CR	8 slots I/O Expansion Unit

Accessories

DP-660	24 V _{DC} /2.5 A, 60 W and 5 V _{DC} /0.5 A, 2.5 W Power Supply with DIN-Rail Mounting
DP-665	24 V _{DC} /2.7 A, 65 W Power Supply with DIN-Rail Mounting
DP-1200 CR	24 V _{DC} /5.0 A, 120 W Power Supply with DIN-Rail Mounting (RoHS)
MDR-20-24 CR	24 V _{DC} /1.0 A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
I-7560 CR	USB to RS-232 Converter (RoHS)

3.2. Modbus TCP I/O Expansion Unit

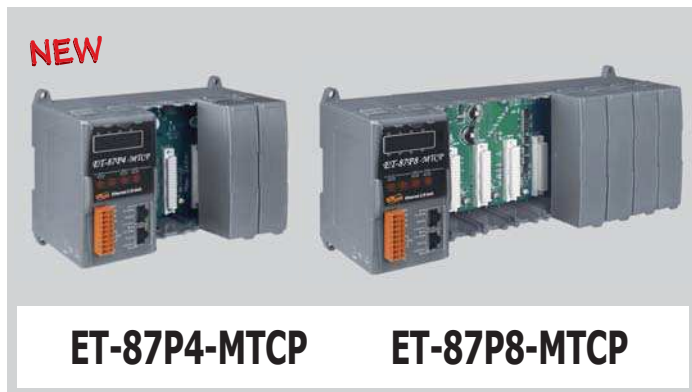

Features

- Two Ethernet Ports for Daisy-Chain Topology
- Supports Modbus TCP
- Supports Modbus RTU/ASCII
- Supports Modbus TCP to RTU Gateway
- Auto Configuration
- 4/8 I/O Slots for I-87K Series Modules
- Operating Temperature: -25 ~ +75 °C



Introduction

ET-87Pn-MTCP series is a Modbus TCP I/O expansion unit to expand I-87K series I/O modules over the Ethernet for industrial monitoring and controlling applications. It offers two Ethernet switch ports for daisy-chain topology. The daisy-chain feature allows ET-87Pn to connect in series to each other or other Ethernet devices. Users can easily simplify the cabling and save installation space with the feature.

It is designed to be used in harsh and noisy environment, so the hardware is manufactured with wide power input range (10 ~ 30 Vdc), isolated power input and can operate under wide temperature (-25 ~ +75°C). There are more than 50 I/O modules supported with the unit, including analog input/output, digital input/output, DI counter modules. To simplify installation and maintenance of I/O modules, it provides many useful features, such as: auto configuration, LED indicators for fault detection, dual watchdog to keep alive, programmable power on and safe values for safety.

Modbus is a very wide known protocol in the industrial manufacturing and environment monitoring fields. Many SCADA software, HMI and PLC has builtin driver to support Modbus devices. Besides, we also provide SDK on different platforms, such as Windows XP, Window CE 5.0/6.0, Linux, MiniOS7. Therefore, it is very easy to integrate remote I/O to customer's applications.

System Specifications

Models	ET-87P4-MTCP	ET-87P8-MTCP
Communication Ports		
Protocol	Modbus TCP Slave	
	Modbus RTU/ASCII Slave	
	Modbus TCP to RTU Gateway	
Ethernet	RJ-45 x 2, 10/100 Base-TX (Auto negotiating, Auto MDI/MDI-X, LED indicators)	
COM 1	RS-232 (to update firmware) (Rx/D, Tx/D and GND); non-isolated	
SMMI		
LED Display	Yes, 5-Digit LED Display	
Push Buttons	4	
I/O Expansion Slots		
Slot Number	4	8
	Note: For High Profi I-87K Modules Only	
Mechanical		
Dimensions (W x H x D)	188 mm x 132 mm x 111 mm	312 mm x 132 mm x 111 mm
Installation	DIN-Rail or Wall Mounting	
Environmental		
Operating Temperature	-25 ~ +75 °C	
Storage Temperature	-30 ~ +80 °C	
Ambient Relative Humidity	10 ~ 90% RH (non-condensing)	
Power		
Input Range	+10 ~ +30 VDC	
Isolation	1 kV	
Redundant Power Inputs	Yes	
Capacity	30 W	
Consumption	2 W	2.4 W

5.5. USB I/O Expansion Unit


• Introduction

The USB-87Pn series USB I/O expansion unit is designed to acquire and control I/O through USB connections. It comprises

- A CPU module with non-volatile memory to backup/restore I/O module configurations; LED indicators to diagnose the I/O module; and a USB port for communication.
- A power module
- A backplane with a number of I/O slots for flexible I/O configuration.

With its patent-pending technologies, namely auto configuration and hot swap, it saves lots of labor on the set up and maintenance of the automation systems. Reliable 3-piece construction enables users to hot swap modules during operation, without rewiring. All I/O module data are backed up in the non-volatile memory of the USB-87Pn. After hot-swapping a module, all settings are automatically loaded to recover.

Furthermore, with the USB communication interface and more than 30 I/O modules for choice, users can apply the unit to nearly any automation system.

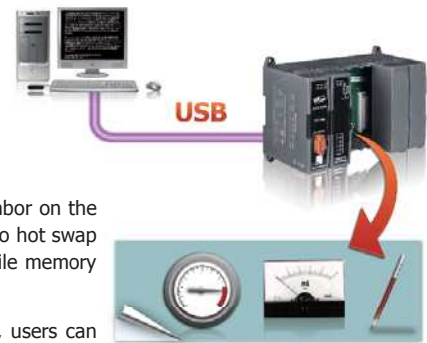

• Features

1. Hot Swap

Reliable 3-piece construction enables users to hot swap modules during operation, without rewiring. All I/O module data are backed up in the non-volatile memory of the USB-87Pn. After hot-swapping a module, all settings are automatically loaded to recover.

2. Auto Configuration

The I-87K I/O modules can be pre-configured and backed up in the non-volatile memory of the RU-87Pn. When the USB-87Pn is power on or plugged in, the USB-87Pn will automatically checks and restores these configurations to each I-87K I/O modules on it.

3. Easy Diagnosis System

Using the DCON Utility, you can easily make a backup of the I-87K module configurations and write to another USB-87Pn. This design can easily and quickly duplicate many USB-87Pn.

4. Easy Maintenance and Diagnosis

There are several LED status indicators to show whether I-87K modules are configured and work properly. If one I-87K module fails, the operator just needs to replace it with one good I-87K module with the same item number. And then checks the LED indicators to know whether the replacement is performed correctly. The LED indicator design makes it easy for maintenance. There is no PC and Notebook needed.

5. Communication

- USB network
The USB network connects the USB-87Pn to regular PC and notebook without any other media converter.

- DCON protocol

I-87K series I/O modules plugged in a USB-87Pn provides a simple command/response protocol (named DCON protocol) for communication. All command/response are in easy use ASCII format.

6. Fully Software Support

The free charge software utility and development kits include

A: DCON Utility: for configuration

B: OPC Servers:

OPC is an industrial standard interface based on OLE technology. With the OPC server, I/O modules can be easily integrated to any software that has OPC client capability.



C. EZ Data Logger

EZ Data Logger is a small data logger software. It can be applied to small remote I/O system.

With its user-friendly interface, users can quickly and easily build a data logger software without any programming skill.

D. Various Software Develop Toolkits

DLL, ActiveX, Labview driver, Indusoft driver, DasyLab driver, Linux driver

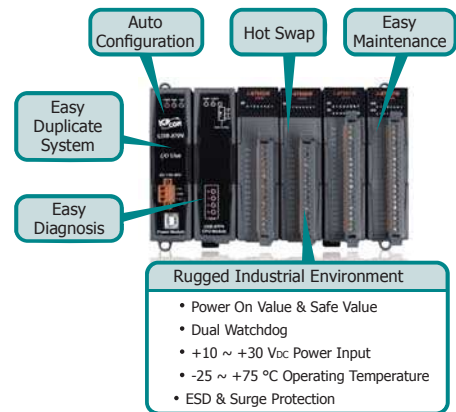

5
5
I/O Expansion Units



Highlight Information

- One USB Port
- Hot Swap Allowed
- Auto Configuration
- LED Indicators for Fault Detection
- DCON Protocol
- 1/2/4/8 I/O Slots for I-87K Modules
- Operating Temperature: -25 ~ +75°C



Introduction


USB-87Pn series is an intelligent I/O expansion unit to expand I-87K series I/O modules over the USB for industrial monitoring and controlling applications.

USB-87Pn is designed to be used in harsh and noisy environment, so the hardware is manufactured with wide power input range (10 ~ 30 V_{DC}), isolated power input and can operate under wide temperature (-25 ~ +75°C). To simplify installation and maintenance of I/O modules, it provides many useful features, such as: hot swap allowed, auto configuration, LED indicators for fault detection, dual watchdog to keep alive, programmable power on and safe values for safety.

There are more than 30 I/O modules supported with the unit, including analog input/output, digital input/output, counter, frequency I/O modules. We provide various software development kits (SDK) and demos, such as DLL, ActiveX, Labview driver, InduSoft driver, Linux driver, OPC server, etc. The I-87K series I/O modules plugged in the USB-87Pn can be easily integrated into variant software system.

Applications

Rich I/O Expansion Ability

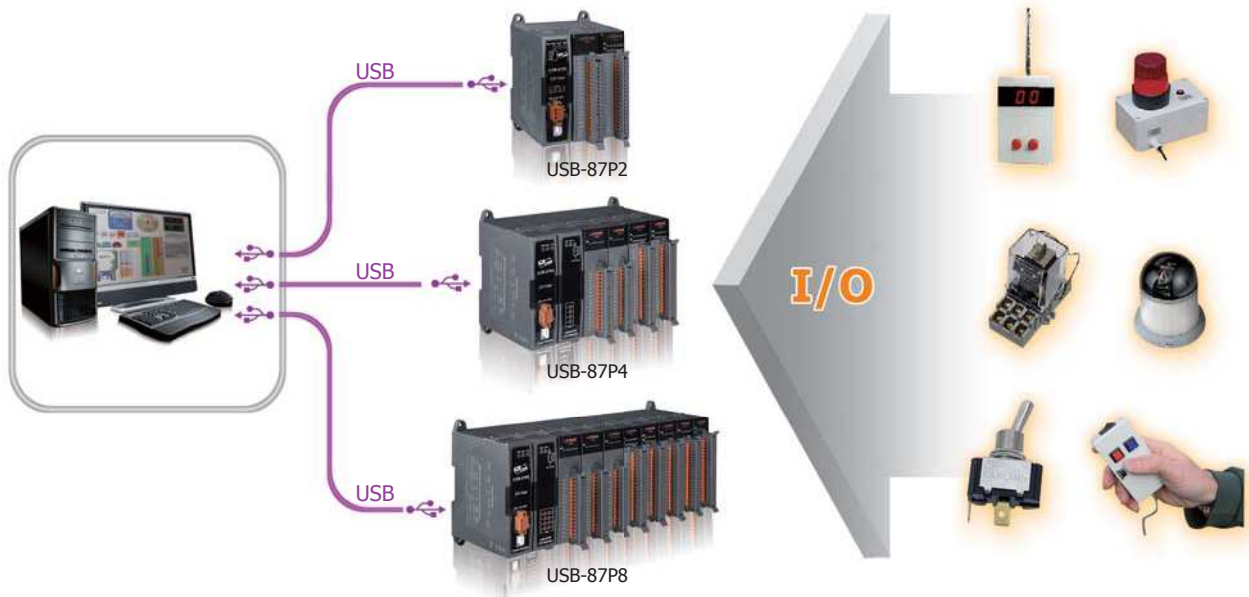


Specifications

Models	USB-87P1	USB-87P2	USB-87P4	USB-87P8
Interface Type (Full speed with USB 1.1 specifications)				
Cable	USB type A connector			
Baud Rate	115200 bps Default			
Isolation	3000 V _{dc}			
ESD Protection	+/-4 K Contact Discharge and +/-8 K Air Discharge			
Communication Protocol	DCON Protocol (ASCII Format)			
Switch				
DIP Switch	8-bit x 1, For auto configuration			
LED Indicators				
Power	Yes			
System Ready	Yes			
Auto Configuration	Yes			
Slot Status	Yes			
I/O Expansion Slots				
Hot Swap	Yes			
Auto Configuration	Yes			
Support Module Type	High profile I-87K module only			
Slots Numbers	1	2	4	8
Mechanical				
Dimensions (W x L x H)	64 mm x 120 mm x 110 mm	95 mm x 132 mm x 111 mm	188 mm x 132 mm x 111 mm	312 mm x 132 mm x 111 mm
Installation	DIN-Rail or Wall Mounting			
Environmental				
Operating Temperature	-25 ~ +75°C			
Storage Temperature	-30 ~ +80°C			
Ambient Relative Humidity	10 ~ 90% RH (non-condensing)			
Power				
Input Range	+10 ~ +30 V _{dc}			
Reverse Polarity Protection	Yes			
Isolation	1000 V _{dc}			
Frame Ground	Yes			
Consumption	1 W	1 W	2 W	2.4 W
Power Board Driving	5 W	8 W	30 W	

Appearance

USB-87P8

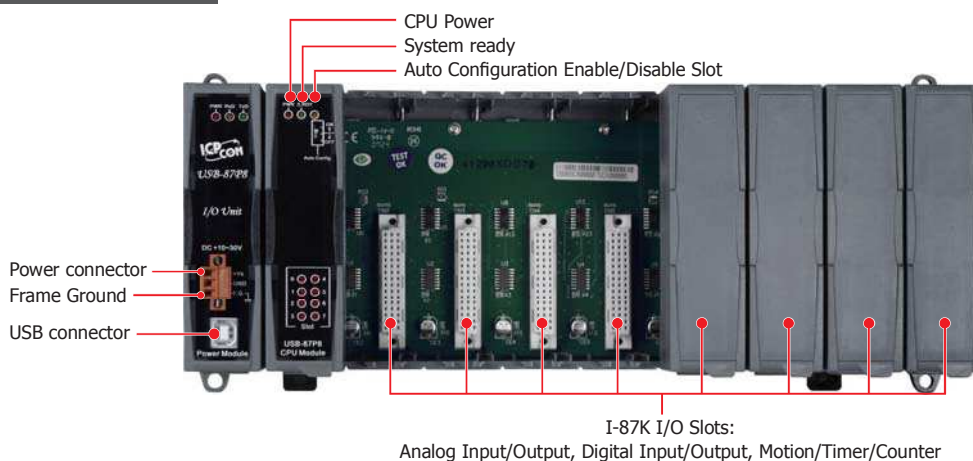

Ordering Information

USB-87P1 CR	1 slot I/O Expansion Unit (RoHS)
USB-87P2 CR	2 slots I/O Expansion Unit (RoHS)
USB-87P4 CR	4 slots I/O Expansion Unit (RoHS)
USB-87P8 CR	8 slots I/O Expansion Unit (RoHS)

Accessories

DP-660	24 V _{dc} /2.5 A, 60 W and 5 V _{dc} /0.5 A, 2.5 W Power Supply with DIN-Rail Mounting
DP-665	24 V _{dc} /2.7 A, 65 W Power Supply with DIN-Rail Mounting
DP-1200 CR	24 V _{dc} /5.0 A, 120 W Power Supply with DIN-Rail Mounting (RoHS)
MDR-20-24 CR	24 V _{dc} /1.0 A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
I-7560 CR	USB to RS-232 Converter (RoHS)