

NS-205PFx-24V/NSM-205PFx-24V

4-Port 10/100 Mbps PoE (PSE) with 1 fiber port Switch; 24V Input



Introduction

The NS-205PFx-24V/NSM-205PFx-24V is a 4-port unmanaged PoE (PSE) with 1 fiber port switch; it supports 4 PoE ports which are classified as power source equipments (PSE). The NS-205PFx-24V/NSM-205PFx-24V makes centralized power supply come true and provides up to 15.4 watts of power per PSE port. Using fiber optics, you can prevent noise from interfering with your system and supports high-speed (100 Mbps) and high-distance (up to 60 km) transmissions.

The NS-205PSE-24V/NSM-205PSE-24V is designed with 24 VDC to 48 VDC boost for PoE application where 48 VDC power supply is not available.

Features

Provides 1 x 100-FX fiber port plus 4 x PoE ports
Automatic MDI/MDI-X crossover for plug-and-play
Each port supports both 10/100Mbps speed auto negotiation
Store-and-forward architecture
Full duplex IEEE 802.3x and half duplex backpressure flow control
4 PoE ports with Power Sourcing Equipment (PSE) operation
Auto-detection of PD (powered devices) and automatic power management
Over-temperature, over-current and over/under-voltage detection
Power Input, +18 ~ +32 VDC
Supports operating temperatures from -30 ~ +75°C
DIN-Rail

Specifications

Models	NS-205PFx-24V series	NSM-205PFx-24V series
Technology		
Standards	IEEE 802.3, 802.3u, 802.3x, 802.3af (Power over Ethernet)	
Processing Type	Store & forward; wire speed switching	
MAC Addresses	1024	
Memory Bandwidth	3.2 Gbps	
Frame buffer memory	512 Kbit	
Flow Control	IEEE802.3x flow control, back pressure flow control	
Ethernet Interface		
RJ45 ports	10/100 Base-T(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection	
LED Indicators	Power, Link/Act, 10/100M, Power Device is detected	
Ethernet Isolation	1500 Vrms 1 minute	
+/- 4kV EMS Protection	Yes	
Fiber Interface (100 Base-FX; SC/ST type)		
Multi-Mode (NS-205PFT/FC)	Multi mode fiber cables: 50/125, 62.5/125 or 100/140 μm Distance : 2 km, (62.5/125 μm recommended) for full duplex Wavelength : 1300 or 1310nm Min. TX Output: - 20 dBm Max. TX Output: -14 dBm Max. RX Sensitivity: -32 dBm Max. RX Overload: -8 dBm Budget: 12 dBm	
Single-Mode (NS-205PFCS)	Single-mode fiber cables: 8.3/125, 8.7/125, 9/125 or 10/125μm Distance: 30 Km, (9/125 μm recommended) for full duplex Wavelength: 1300 or 1310nm Min. TX Output: - 15 dBm Max. TX Output: -8 dBm Max. RX Sensitivity: -34 dBm Max. RX Overload: -5 dBm Budget: 19 dBm	
Single-Mode (NS-205PFCS-60)	Single-mode fiber cables: 8.3/125, 8.7/125, 9/125 or 10/125μm Distance: 60 Km, (9/125 μm recommended) for full duplex Wavelength: 1300 or 1310nm Min. TX Output: - 5 dBm Max. TX Output: 0 dBm Max. RX Sensitivity: -35 dBm Max. RX Overload: -5 dBm Budget: 30 dBm	

Power Input		
Input Voltage Range	+18 ~ +32 VDC for PoE output	
Power consumption	0.25@ 24 VDC without PD loading	
Protection	Power reverse polarity protection	
+/- 4kV EMS Protection	Yes	
Connection	3-Pin Removable Terminal Block	
PoE Output (Port1 ~ 4)		
PoE Compliance	100% IEEE 802.3af compliant	
PoE Classification	PSE (Power Sourcing Equipment)	
PoE Voltage	+48 VDC depending on power input	
PoE Power	Up to 15.4 watts per channel	
PoE Operation	Automatic detection and power management	
Mechanical		
Casing	Plastic (Flammability UL 94V-0)	Metal (IP30 Protection)
Dimensions (W x L x H)	31 mm x 157 mm x 113 mm	25 mm x 168 mm x 119 mm
Installation	DIN-Rail	
Environmental		
Operating Temperature	-30 °C ~ +75 °C	
Storage Temperature	-40 °C ~ +85 °C	
Ambient Relative Humidity	10% ~ 90% RH, non-condensing	

LED Indicator Functions:

LED	Color	Description
Power	Red On	Power is On
	Red Off	Power is Off
Port1 ~ 4	Orange On	Power Device is detected
	Green On	Link/Act
Port5	Green On	Link/Act

Pin Function for Terminal Block:


External power supply is connected using the removable terminal block:

PWR : Power input (+18 ~ +32 VDC) and should be connected to the power supply (+)


GND : Ground and should be connected to the power supply (-)

F.G. : F.G. stands for Frame Ground (protective ground). It is optional. If you use this pin, it can reduce EMI radiation; improve EMI performance and ESD protection.

Dimensions: NS-205PFx-24V

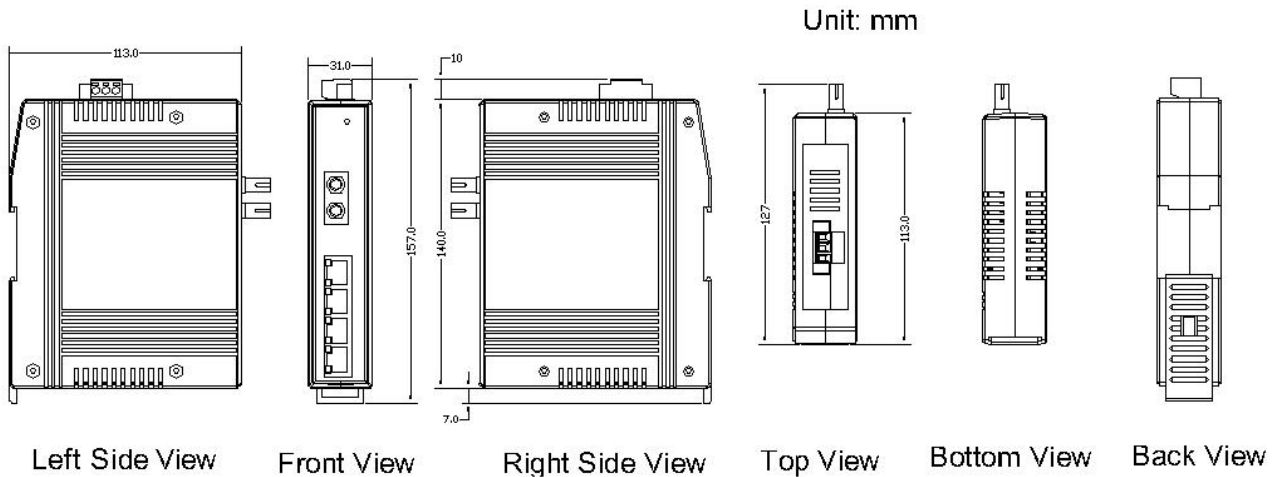

Dimensions: NSM-205PFx-24V

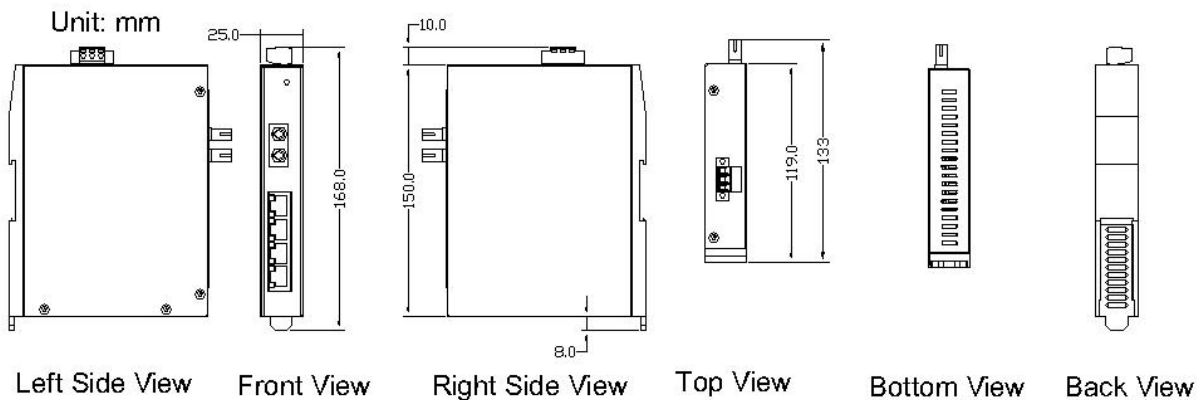

Ordering information

NS-205PFT-24V CR	Multi-mode, ST Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; 24V Input (RoHS)
NS-205PFC-24V CR	Multi-mode, SC Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; 24V Input (RoHS)
NS-205PFCS-24V CR	Single-mode 30 Km, SC Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; 24V Input (RoHS)
NS-205PFCS-60-24V CR	Single-mode 60 Km, SC Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; 24V Input (RoHS)
NSM-205PFT-24V CR	Multi-mode, ST Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; metal case; 24V Input (RoHS)
NSM-205PFC-24V CR	Multi-mode, SC Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; metal case; 24V Input (RoHS)
NSM-205PFCS-24V CR	Single-mode 30 Km, SC Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; metal case; 24V Input (RoHS)
NSM-205PFCS-60-24V CR	Single-mode 60 Km, SC Connector, 4-Port 10/100 Mbps PoE (PSE) with 1 Fiber port Switch; metal case; 24V Input (RoHS)

Accessories

MDR-60-24	24V/2.5A, 60 W Power Supply with DIN-Rail Mounting
DIN-KA52F	24V/1.04A, 25 W Power Supply with DIN-Rail Mounting
KA-52F	24V/1.04A, 25 W Power Supply